

# MAXITEC RE-ROOFING

## Composite waterproofing membrane

### Description

Prefabricated modified composite polymer-bitumen waterproofing membrane composed of distilled bitumen and differentiated waterproofing masses, specifically designed for use over old bituminous waterproofing membranes.

The upper face compound is composed of distilled bitumen and elasto-plastomers while the lower face compound is composed of distilled bitumen and special polymers which provide particular characteristics of adhesion & workability.


A special waterproofing mass is used to bond the upper & lower compounds.

MAXITEC RE-ROOFING is reinforced with a woven non woven single strand composite polyester fabric, with very good mechanical characteristics and exceptional dimensional stability. The PA version is self-protected with mineral slates which reduce heat absorption and improve the durability of the membrane.

MAXITEC RE-ROOFING PA has a 10 cm side selvedge and a 15 cm head selvedge which promotes the adhesion between the various sheets.

### Stratigraphy

1. PE film
2. R compound
3. Waterproofing mass
4. Single strand composite polyester fabric
5. Waterproofing mass
6. Mineral finish

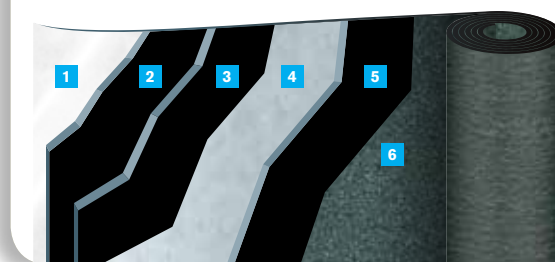

### Methods of application

The application of the membrane is generally obtained by heat, using either a gas or hot air torch making sure to provide for side laps of 10 cm and head laps of 15 cm.

Considering the particular areas of usage the product must be applied fully bonded to the existing membrane, the same must also be done for those areas such as the perimeter, verticals and change of slope.

For further information we recommend to consult PLUVITEC's technical literature.

### Fields of use

MAXITEC RE-ROOFING is specifically indicated for use as a re-furbishment layer over existing old bituminous waterproofing membranes, especially those with mineral slate finish considering the excellent characteristics of adhesion and workability.

MAXITEC RE-ROOFING is compatible and can be applied with all PLUVITEC membranes, both APP & SBS.

### Fields of use



#### EN13707 Continuous Roofs (Certificate n° 0958-CPR-2045/1)

	N° layers			Method of application					Type of application			Type					
	Single Layer	Double Layer	Multilayer	Torch	Hot Air	Mixed (Torch / Air)	Cold Bond Glue	Mechanical Fixing	Thermo Adhesive / Self-Adhesive	Fully Bonded	Partially Bonded	Loose Laid	Complimentary Layer	Top Layer	Heavy Protection	Anti-root	Other Uses
<b>MAXITEC RE-ROOFING PA 5.0 KG/M<sup>2</sup></b>		▪	▪	▪						▪				▪			
<b>MAXITEC RE-ROOFING PA 5.5 KG/M<sup>2</sup></b>		▪	▪	▪						▪				▪			

The waterproofing membrane based on distilled bitumen and polymers, as shown in this data sheet does not require the issue of a MSDS, because it does not contain dangerous substances. The information data sheet for the proper use of products is available.

## How to apply



# MAXITEC RE-ROOFING

## Application & recommendations

- Clean the application surface.
- Apply by gas or hot air torch a 25 cm strip of woven non woven polyester reinforced membrane along all the vertical up stands.
- Position the membrane always starting from the lowest point, in order to have all the overlaps with the slope.
- Apply and position the membranes staggered to avoid creating areas where the membrane overlap against the slope and in the direction of the drains.
- After having positioned the roll, re-roll the material for half of its length and begin application; repeat the same operation for the remaining half of the roll. (Draw. N.1)
- It is necessary to heat the entire surface, except the overlaps, of the lower face to obtain a full adhesion to the application surface.
- During the application by torch, the material needs to be heated to a point where the compound starts to flow in such a way that it fully saturates the application surface. The melted flow of compound obtained by torching is the R mass. (Draw. N.2)
- Torch the side laps (10 cm) and head laps (15 cm) with a torch for overlaps. During this stage the overlaps should be pressed by using a roller (15 kg) from which a bead of compound should flow. Do not iron the overlaps. (Draw. N.3)
- Apply the vertical membrane sheet having the same characteristics of the waterproofing membrane and dimensions equal to the width of the roll, making sure that it overlaps the horizontal one by at least 10 cm, heating it with a gas torch and squeezing it with a trowel until a bead of compound appears from underneath. (Draw. N.4)
- The height of the vertical must be equivalent or superior to the finished surface by at least 15 cm.
- Verticals higher than 20 cm must be done with MAXITEC P+V 4 mm or MAXITEC PA 5,0/5,5 kg/m<sup>2</sup>.

To best use the technical characteristics of bituminous membranes and guarantee the maximum performance and durability of the jobs where they are used, some simple but fundamental rules must be respected.

- The rolls are to be stored in an upright position, preferably indoors in a dry and ventilated area, away from heat sources and avoiding to stack them one on top of the other to avoid possible deformations which may compromise the application. When storing with original packaging, these should not be stacked more than two plts high using appropriate wooden spacers.
- The rolls shall be kept in a warm or heated storage area during application, should the workability of the material deteriorate or become stiff and difficult to install during application, these should be returned to the heated storage area and substituted with new rolls. The rolls that are temporarily stored on the roof before application, shall be kept elevated by being left on their own pallets and shall be covered and protected from the weather.
- The application surface must be smooth dry & clean.
- In situations of application on vertical surfaces superior to 2 meters or on very sloped substrates, apply suitable mechanical fixings to the head and side laps, after which they will be sealed.
- The application must be done at temperature higher than + 5°C.
- The application must be interrupted in adverse weather conditions (high humidity, rain, etc.).
- The pallets on which the rolls are packaged are intended for normal warehouse use.
- The materials on stock should be rotated following a first in first out rotation.

## Technical data

Technical Characteristics	Measure Units	Reference Norm	PA		Tolerance
Type of reinforcement			Single strand polyester		
Upper face finish			Mineral *		
Lower face finish			PE film		
Length	m	EN 1848-1	8 -1%		
Width	m	EN 1848-1	1 -1%		
Mass	kg/m <sup>2</sup>	EN 1849-1	5,0	5,5	±10%
Cold flexibility	°C	EN 1109	-10		
Flow resistance	°C	EN 1110	120		
Flow resistance after ageing	°C	EN 1296	NPD		-10°C
Shear resistance L / T	N / 5 cm	EN 12317-1	500/400	750/550	-20%
Tensile strength L / T	N / 5 cm	EN 12311-1	600/500	850/650	-20%
Elongation at break L / T	%	EN 12311-1	35/35	40/40	-15
Tearing resistance L / T	N	EN 12310-1	150/150	200/200	-30%
Static puncture resistance	kg	EN 12730	15	20	
Dynamic puncture resistance	mm	EN 12691	900	1250	
Fire resistance		EN 13501-5	F ROOF		
Fire reaction		EN 13501-1	F		
Impermeability after artificial ageing	kPa	EN 1296	60		
Watertightness	kPa	EN 1928	60		

## Sizes & packing

	PA 5,0 kg/m <sup>2</sup>	PA 5,5 kg/m <sup>2</sup>
Rolls size (m)	8x1	8x1
Rolls per pallet	25	23
Square meters per pallet	200	184

Sizes & packing may vary depending on the type of transportation. The technical data given is based on average values obtained during production. We reserve the rights to change or modify the nominal values without prior notice or advice. The information contained in this data sheet are based on our experience. We cannot take any responsibility for a possible incorrect use of the products. The customer has to choose under their own responsibility a product fit for the intended use.

\* It is impossible to guarantee the color uniformity on self protected mineral membranes as the suppliers of the same do not provide any also. All self protected mineral finished membranes undergo color variations over time due to the exposure to atmospheric agents. Normally these variations in time will gradually become uniform.

NPD = No Performance Declared in accordance with the EU Construction Products Directive.